formerly Ponzio Polska **PROCURAL**

SL600TTEVO

$U_w = 1.50\ W/(m^2K)$

*reference construction dimensions: L 2400 x H 2400 mm
U_g = 1.0 W/(m²K), double glazing

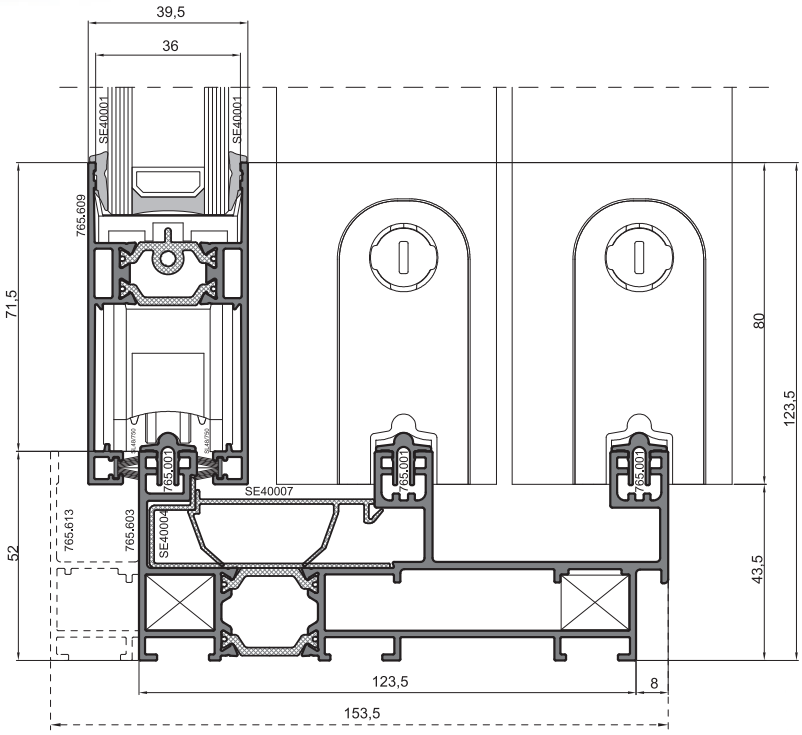

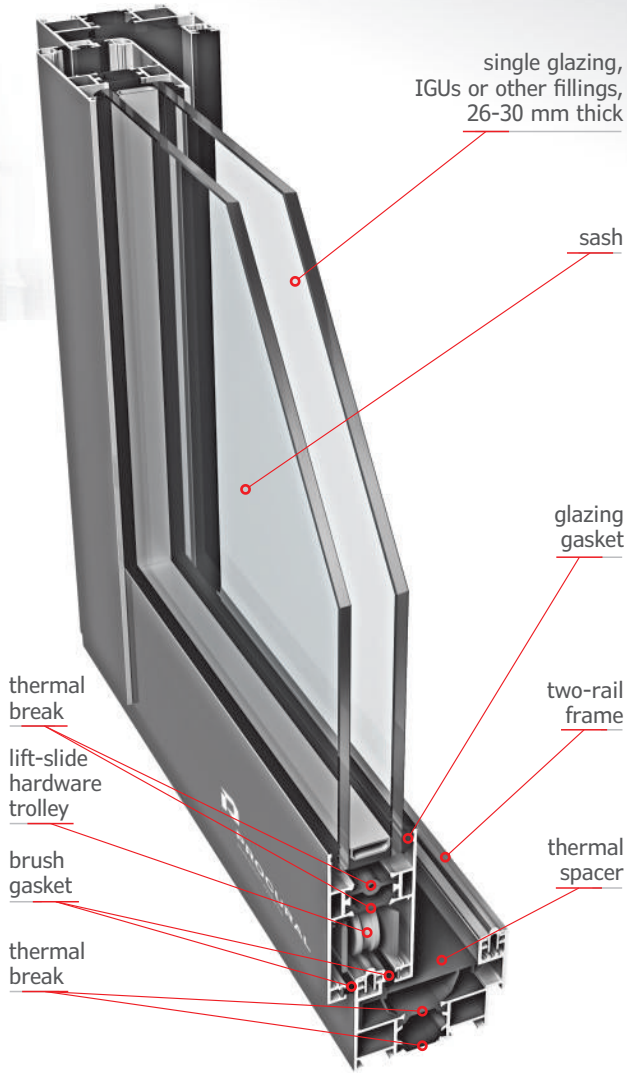

An insulated aluminium profile system designed for the construction of sliding windows and spatial constructions such as balcony and loggia structures

TECHNICAL PARAMETERS

Filling thickness	26 - 30 mm
Sash depth	46 mm
Frame depth	73/95.5 mm two-rail frame 131.5/153.5 mm three-rail frame
Maximum sash dimensions	L 2000 x H 3000 mm
Maximum sash weight	220 kg
Air permeability	class 4 (highest)
Watertightness	class 7A (300 Pa)
Thermal insulation	U_f from 3.10 W/(m²K) U_w from 1.50 W/(m²K) (U_g = 1.0)
Resistance to wind load	class C3/B3* (* page 48)

- 37 mm width of central mullion - slender yet rigid constructions
- PROCURAL system hardware
- glazing and brush gaskets
- interconnected with other PROCURAL systems
- vertical sliding pass-through windows available using dedicated hardware
- concealed sliding door solution

Certification

- type testing in acc. with EN 14351-1 + A1